

# **GWT6-2A G BUILD ENGINE**

## **GWT6-2A 15, GWT6-2A 18**

*Power range: 92.3—119.2 kW; 123.8—159.8 bhp  
Fixed speed; full-load speed ranges: 1500 and 1800 r/min*

### **TURBOCHARGED HEAVY DUTY G BUILD DIESEL ENGINE**

#### **SPECIAL ATTRIBUTES**


- suitable for generating sets
- 250-hour service intervals
- continuous operation in ambient temperatures up to 45°C (113°F)
- cold start down to -20°C (-4°F)

#### **BASIC ENGINE CHARACTERISTICS**

- six cylinders
- diesel fuelled
- direct injection
- liquid cooled
- turbocharged

#### **DESIGN FEATURES AND EQUIPMENT**

- standard oil and fuel filters
- 12V electric start (optional 24V)
- anti clockwise rotation, looking on the flywheel
- SAE 10" and 11.5" flywheel
- SAE 3 flywheel housing
- radiator with fan guard
- cast-iron crankcase
- self-vent fuel system
- inline fuel injection pump
- flywheel with ring gear
- air cleaner
- oil pressure sender/switch combination
- water temperature sender/switch combination
- spin-on lubricating-oil filter
- fuel filter/agglomerator
- inlet and exhaust manifolds
- operators' handbook

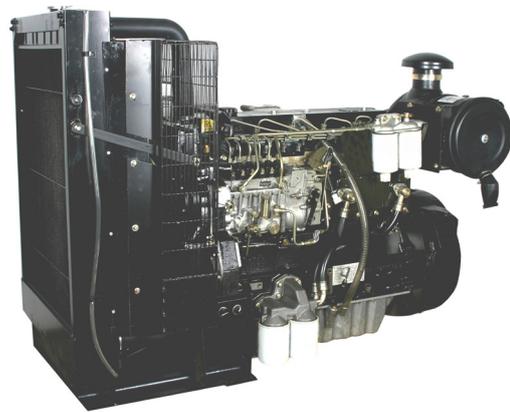

**GWT6-2A G BUILD ENGINE**

#### **POWER OUTPUTS TO ISO 3046**

		r/min	1500	1800
Continuous Power	kW		92.3	108.4
	bhp		123.8	145.4
Overload Power	kW		102	119.2
	bhp		136.8	159.8


#### **FUEL CONSUMPTION**

		r/min	1500	1800
litre/hr @ 100% power (continuous power)			24.0	28.7

**Notes:** 1. Power ratings are measured at the flywheel end.  
2. Power ratings and fuel consumption figures apply to a fully run-in, non-derated engine without a radiator and fan fitted, and without power-absorbing accessories or transmission equipment.

**APPROXIMATE DIMENSIONS AND WEIGHT**

Length (A)	mm	1540
	in	60.6
Height (B)	mm	1108
	in	43.6
Width (C)	mm	716
	in	28.2
Dry Weight	kg	740
	lb	1630

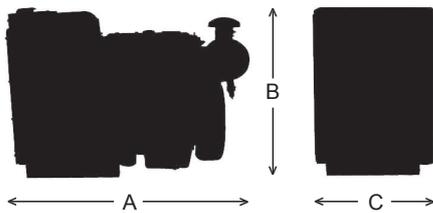

**RATING DEFINITIONS, TO ISO 3046**

ISO Standard Conditions

Barometric pressure	100 kPa
Relative humidity	30%
Ambient temperature at air inlet manifold	25°C

**Fixed speed power: continuous power (ICN)**

The power in kW which the engine is capable of delivering continuously at the stated crankshaft speed, under ISO standard conditions, measured at the flywheel without power-absorbing accessories, provided that the engine is overhauled and maintained in good operating condition and that fuel to BS EN 590 Class A1 or A2, and lubricating oils to the correct performance specification and viscosity classification as recommended by Lister Petter Limited, are used.

**Fixed speed power: overload power (ICXN)**

The maximum power in kW which the engine is capable of delivering intermittently at the stated crankshaft speed for a period not exceeding one hour in any period of twelve hours' continuous running, immediately after working at the continuous power, under

**TECHNICAL DATA**

Model	GWT6-2A 15	GWT6-2A 18
Number of cylinders	6	
Firing order (number 1 cylinder is at gear end)	1 5 3 6 4 2	
Type of fuel injection	Direct	
Aspiration	Turbocharged	
Direction of rotation, looking on flywheel	Anti clockwise	
Cylinder bore	mm	100
	in	3.94
Stroke	mm	127
	in	5
Total cylinder capacity	litre	5.99
	in <sup>3</sup>	365.2
Compression ratio	17.5:1	
Rated maximum full-load speed (r/min)	1500	1800
Mean piston speed	m/sec	6.35
	f/sec	20.8
Oil consumption	Maximum 0.2% of fuel consumption	

ISO standard conditions and with the provisions specified for continuous power above.

**De-rating**

For non-standard site conditions, reference should be made to relevant BS, ISO and DIN standards.

A comprehensive range of options allows you to select a specification that matches your requirements. Please ask your Lister Petter distributor (see panel below right).

**UK**

LISTER PETTER LIMITED  
 Long Street, Dursley, Gloucestershire, GL11 4HS, England  
 TEL: +44 (0)1453 544141; FAX: +44 (0)1453 546732  
 E-mail: sales@lister-petter.co.uk  
 www.lister-petter.co.uk

**UAE**

LISTER PETTER FZE  
 Dubai Silicon Oasis Headquarters,  
 PO Box 341077, Dubai, UAE  
 TEL: +971 4 372 4331; FAX: +971 4 372 4318  
 E-mail: sales@listerpettergroup.com  
 www.lister-petter.co.uk

**DISTRIBUTOR'S ADDRESS**

*Lister Petter have made efforts to ensure that the information in this data sheet is accurate but reserve the right to amend specifications and information without notice and without obligation or liability.*