

# LT AND LV ENGINES

## LT1, LV1

*Power ranges: 1.0—7.4 kW; 1.3—9.9 bhp*

*Variable speed builds, full load speed range: 1000—3000 r/min*

*Fixed speed builds: 1500 or 3000 r/min*

### DURABLE, RELIABLE, VERSATILE SINGLE CYLINDER AIR COOLED DIESEL ENGINES

#### SPECIAL ATTRIBUTES

- designed for continuous operation in ambient temperatures up to 52°C (122°F)
- oil cooling by means of air flow over deep crankcase finning
- clockwise and anticlockwise rotation builds available

#### BASIC ENGINE CHARACTERISTICS

- single cylinder
- diesel fuelled
- direct injection
- air cooled
- naturally aspirated

#### DESIGN FEATURES AND EQUIPMENT

- air cleaner (type according to application)
- inlet and exhaust manifolds
- self-vent fuel system (LV1 only)
- self-regulating plunger type lubricating oil pump
- decompressor lever
- flywheel with cooling fan
- sheet metal or cast SAE 5 fan shroud depending on build
- mechanical governing
- hand start (electric optional)
- 250 hour service intervals
- operators' handbook

#### EMISSIONS

- complies with EU Stage 3A emissions regulations.



**LT1 SHOWN WITH THE OPTIONAL FUEL TANK & SILNECER FITTED**

#### OPTIONAL ITEMS

- 12V electric start
- fuel tank (5 or 8 litre) with filter
- fuel filter
- silencer
- lifting eye (LV1 only)

A range of options allows you to select a specification that matches your requirements; please consult your Lister Petter distributor.

#### WARRANTY

- standard: two years from manufacture
  - optional: five-year limited warranty
- Conditions apply.

TECHNICAL DATA			LT1	LV1
Type of fuel injection			Direct	Direct
Number of cylinders			1	1
Aspiration			Natural	Natural
Direction of rotation looking on flywheel end			According to build	According to build
Nominal cylinder bore	mm		82.55	85.73
	in		3.25	3.375
Stroke	mm		76.20	82.55
	in		3.00	3.25
Total cylinder capacity	litre		0.4078	0.4765
	in <sup>3</sup>		24.89	29.08
Compression ratio		Compression ratio	16.4:1	16.2:1
Sump capacity with the engine level	litre		1.3	1.3
	pint		2.3	2.3
	US quart		1.4	1.4
Engine mounted fuel tank capacity	litre		8.25 / 13.5	13.5
	pint		14.5 / 23.7	23.7
	US quart		8.7 / 14.2	14.2
Maximum permissible crankshaft end thrust	kgf		68.0	68.0
	lbf		149.9	149.9
Lubricating oil pressure minimum	bar		0.4	0.4
	lbf ft <sup>2</sup>		5.8	5.8

POWER OUTPUTS TO ISO 3046								
Variable Speed		r/min	1000	1500	1800	2000	2500	3000
LT1	Continuous Power	kW	1.9	3.0	3.6	4.0	5.0	5.6
		bhp	2.5	4.0	4.8	5.4	6.7	7.5
	Fuel Stop	kW	2.1	3.3	4.0	4.4	5.5	6.2
		bhp	2.8	4.4	5.3	5.9	7.4	8.3
LV1	Continuous Power	kW	2.2	3.5	4.3	4.8	5.8	6.7
		bhp	2.9	4.8	5.8	6.4	7.8	9.0
	Fuel Stop	kW	2.4	3.9	4.7	5.3	6.4	7.4
		bhp	3.2	5.2	6.3	7.0	8.6	9.9

**RATING DEFINITIONS, TO ISO 3046**

**1. Fixed speed power: continuous power (ICN)**

The power in kW which the engine is capable of delivering continuously at the stated crankshaft speed, under conditions of 100 kPa barometric pressure, 30% relative humidity and 25°C air inlet temperature, provided that the engine is overhauled and maintained in good operating condition and that fuel to BS EN 590 Class A1 or A2, and lubricating oils to the correct performance specification and viscosity classification as recommended by Lister Petter Limited, are used.

**2. Fixed speed power: overload power (ICXN)**

The maximum power in kW which the engine is capable of delivering intermittently at the stated crankshaft speed for a period not exceeding one hour in any period of twelve hours continuous running, immediately after working at the continuous power, under the conditions specified in (1) above.

**3. Variable speed: fuel-stop power, continuous power (IFN)**

The maximum power in kW which an engine is capable of delivering continuously at stated crankshaft speed, under the conditions as specified in item 1, with the fuel limited so that the fuel stop power cannot be exceeded.

**4. Variable speed: fuel-stop power, intermittent power (IOFN)**

The maximum power in kW which an engine is capable of delivering intermittently at the stated crankshaft speed, for a period not exceeding 1 hour in any period of 12 hours continuous running immediately after running at the Continuous Fuel Stop Power rating.

**5. De-rating**

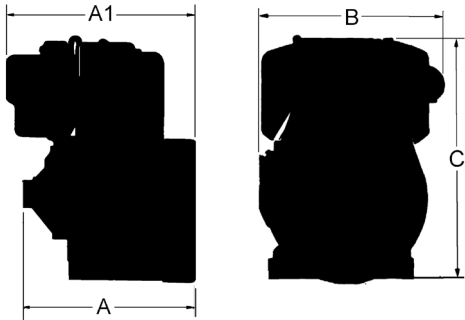
For non-standard site conditions, reference should be made to relevant BS, ISO and DIN standards.

The overload capability applies to a fully run-in engine. This is normally attained after a running period of about 50 hours.

TORQUE TO ISO 3046								
Variable Speed		r/min	1000	1500	1800	2000	2500	3000
LT1	Fuel Stop	Nm		20.9	21.0	21.0	20.9	19.5
		lbf ft		15.4	15.5	15.5	15.4	14.4
Nm		22.7	24.8	25.0	25.0	24.4	20.0	
lbf ft		16.8	18.3	18.5	18.5	18.0	14.8	

In the above table the 100% load figures are subject to 5% tolerance but all other figures are approximate and not guaranteed.

FUEL CONSUMPTION								
Variable Speed		r/min	1000	1500	1800	2000	2500	3000
LT1	Continuous Power, 100% Load	litre/hr	0.6	1.0	1.1	1.3	1.7	2.2
		US gal/hr	0.17	0.25	0.30	0.34	0.44	0.58
litre/hr		0.5	1.1	1.3	1.5	1.9	2.4	
US gal/hr		0.13	0.35	0.39	0.49	0.59	0.64	

APPROXIMATE DIMENSIONS AND WEIGHT						
		Sheet metal fan shroud		Cast fan shroud		
		LT1	LV1	LT1	LV1	
	Dry weight	kg	83	83	92	92
		lb	183	183	203	203
	Length (A) without fuel tank	mm	354	358	359	359
		in	13.9	14.0	14.1	14.1
	Length (A1) with fuel tank	mm	404	398	403	403
		in	15.9	15.7	15.8	15.8
	Width (B)	mm	371	394	424	424
		in	14.6	15.5	16.7	16.7
	Height (C)	mm	503	503	503	503
		in	19.8	19.8	19.8	19.8

**UK**

LISTER PETTER LIMITED  
 Long Street, Dursley, Gloucestershire, GL11 4HS, England  
 TEL: +44 (0)1453 544141; FAX: +44 (0)1453 546732  
 E-mail: sales@lister-petter.co.uk  
 www.lister-petter.co.uk

**UAE**

LISTER PETTER FZE  
 Dubai Silicon Oasis Headquarters,  
 PO Box 341077, Dubai, UAE  
 TEL: +971 4 372 4331; FAX: +971 4 372 4318  
 E-mail: sales@listerpettergroup.com  
 www.lister-petter.co.uk

**DISTRIBUTOR'S ADDRESS**

*Lister Petter have made efforts to ensure that the information in this data sheet is accurate but reserve the right to amend specifications and information without notice and without obligation or liability.*