

SIGMA VARIABLE SPEED ENGINE

SW 30 - 22

Power range: 25.0 - 42.0 kW; 34.0 - 57.1 bhp
Variable speed: 1200 - 2200 r/min

NATURALLY ASPIRATED HEAVY DUTY VARIABLE SPEED DIESEL ENGINE

SPECIAL ATTRIBUTES

- designed for continuous operation in ambient temperatures up to 50°C (122°F)
- unaided cold start down to -2°C (28.4°F)

BASIC ENGINE CHARACTERISTICS

- three cylinders
- diesel fuelled
- direct injection
- liquid cooled
- naturally aspirated

DESIGN FEATURES AND EQUIPMENT

- standard oil and fuel filters
- 12V electric start
- anti clockwise rotation, looking on flywheel
- SAE 10" flywheel
- SAE3 flywheel housing
- radiator with fan guard
- cast-iron crankcase
- self-vent fuel system
- inline fuel injection pump
- flywheel with ring gear
- air cleaner
- low oil pressure switch
- spin-on lubricating oil filter
- primary/secondary fuel filter
- inlet and exhaust manifolds
- 250-hour service intervals
- operators' handbook
- instrumentation package




**SIGMA
VARIABLE
SPEED ENGINE**

TECHNICAL DATA

Model		SW 30 - 22
Number of cylinders		4
Firing order (number 1 cylinder is at gear end)		1 3 4 2
Type of fuel injection		Direct
Aspiration		Natural
Direction of rotation, looking on flywheel		Anti Clockwise
Cylinder bore	mm	102
	in	4.02
Stroke	mm	110
	in	4.33
Total cylinder capacity	litre	3.59
	in ³	219.2
Compression ratio		17.4:1
Rated maximum full-load speed (r/min)		2200
Idling speed (r/min)		550
Oil consumption		Maximum 0.3% of fuel consumption

APPROXIMATE DIMENSIONS AND WEIGHT

Length (A)	mm	1198
	in	47.16
Height (B)	mm	982
	in	38.66
Width (C)	mm	730
	in	28.74
Dry Weight	kg	485
	lb	1069.24

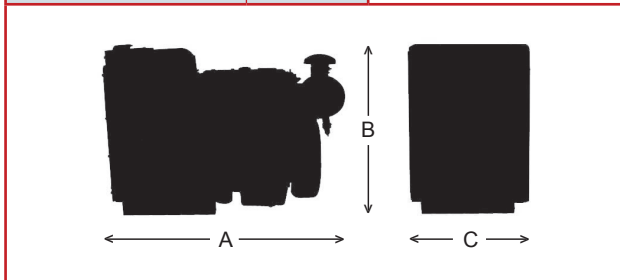

A comprehensive range of options allows you to select a specification that matches your requirements. Please ask your Lister Petter distributor (see panel below right).

POWER OUTPUTS TO ISO 3046

		r/min	1200	1500	1800	2200
Variable Speed	Fuel Stop Power	kW	25.5	34.0	37.5	42.0
		bhp	34.7	46.2	51.0	57.1

TORQUE TO ISO 3046

		r/min	1200	1500	1800	2200
Variable Speed	Fuel Stop Torque	Nm	202.8	216.4	198.5	181.7
		lbf ft	149.6	159.6	146.4	134

FUEL CONSUMPTION

Fuel Stop Power	r/min	1200	1500	1800	2200
	litre/hr	6.9	9.5	10.7	12.7

RATING DEFINITIONS, TO ISO 3046

ISO Standard Conditions

Barometric pressure	100 kPa
Relative humidity	30%
Ambient temperature at air inlet manifold	25°C

Variable speed: fuel stop power, continuous power (IFN)

The maximum power in kW which an engine is capable of delivering continuously at stated crankshaft speed, with the fuel limited so that the fuel stop power cannot be exceeded. The output ratings apply only to fully run-in engines without radiator, fan or other power absorbing accessories.

UK

LISTER PETTER LIMITED
 Long Street, Dursley, Gloucestershire, GL11 4HS, England
 TEL: +44 (0)1453 544141; FAX: +44 (0)1453 546732
 E-mail: sales@lister-petter.co.uk
 www.lister-petter.co.uk

UAE

LISTER PETTER FZE
 Dubai Silicon Oasis Headquarters,
 PO Box 341077, Dubai, UAE
 TEL: +971 4 372 4331; FAX: +971 4 372 4318
 E-mail: sales@listerpettergroup.com
 www.lister-petter.co.uk

DISTRIBUTOR'S ADDRESS

Lister Petter have made efforts to ensure that the information in this data sheet is accurate but reserve the right to amend specifications and information without notice and without obligation or liability.